



RESIDENTIAL



EUROLAN

CONNECT IT

Since 1 November 2021, Eurolan has been acquired by Ahlsell AB. Ahlsell is at the forefront and strives to constantly develop its offer around new, exciting technology that gives you added value. A big customer benefit with Ahlsell's acquisition of Eurolan is that you as an installer now have access to a really good product range and can also shop for everything in the same place.

Eurolan Group is one of the leading european suppliers of copper and fiber optic cabling systems (SCS), fiber to the home (FTTx), 19-inch telecommunication racks and universal home networking.

The entire Eurolan range is stored in Ahlsell's logistics center in Hallsberg for delivery the day after ordering, as well as a larger range in Ahlsell's stores around Sweden, Norway and Finland.

ahlsell

Our goal is to efficiently produce innovative products of high quality and to competitive prices. Our system designers are constantly in search of new solutions and improvement of the quality of existing products.

We have a wide range of solutions for information systems of both corporate and residential sectors.



SUNDA HUS / BYGGVARUBEDÖMNINGEN

Byggvarubedömningen shall provide optimal tools for facilitating the building and real estate sector's players to choose building materials that contribute to sustainable development. Through an active dialogue with material manufacturers, the Building Supply Assessment shall constitute the obvious choice for registration of products.

SundaHus offers property owners security, now and in the future, through a wide range of services for conscious choice of materials. With a web-based system and qualified advice, SundaHus is a holistic solution to systematize the work of phasing out hazardous substances in a building's entire life cycle.

25-YEAR SYSTEM WARRANTY

As technology advances, the demands on the transmission rate in our data networks also increase. This also reduces the margins in the components, which imposes even higher demands on the installers regarding theoretical and practical knowledge of the products and data networks.

In order to increase the quality, secure the function and minimize costs, we therefore offer installation companies free courses in the form of certification courses where we want to provide information about Eurolan products and what it takes to install a residential or real estate network.

- APARTMENT DISTRIBUTION -



C6 UTP SLIMLINE CABLE, CONDUIT

Treated unshielded category 6 U/UTP slimline with single cable in 16mm tubes/ double cables in 20mm tubes

Number of meters in packaging: 100 m

Color of flex pipe: Blue

Color of cables: Blue, White

Weight: 11 kg

- Our preferred range saves time because deletions in place disappear
- Eliminates problems with pulling cable when sharp bends in the wall
- Reduced costs through fewer working hours
- The product is moldable
- Halogen-free flex pipe
- Meter Marked



E-number	Part number	Description
PM Flex tube		
1414495	19PD-16-1U6-25WT-100	1xC6 U/UTP 16mm Conduit
1414496	19PD-20-2U6-25WT-100	2xC6 U/UTP 20mm Conduit
PIPELIFE Powerflex tube		
1414490	1xUTP C6 LSZH	16MM 100M
1414469	2XUTP C6 LSZH	20MM 100M
1414468	2XUTP C6 LSZH	20MM 50M

Only 5.4 mm
in diameter

C6 UTP SLIMLINE CABLE

EuroLAN Category 6 is a halogenfree (LSZH) distribution network cable.

The cable is verified to 250 MHz bandwidth.

Complies with the specifications according to EIA/TIA-568-C.2; ISO/IEC 11801 2nd ed;

IEC 61156-5; EN 50173; EN 50288-6-1; IEEE 802.3at.

Supports ethernet protocols: 10Mbit/100Mbit/1000Mbit (1Gbit).

Copper diameter: 0,55mm

Isolation: Polyethylene

Outer diameter: 5,4 mm

Number of pairs: 4 twisted pairs

Weight: 31 kg/km

Colour: White

Jacket: Halogen free (LSZH)



E-number	Part number	Description
4903203	19D-U6-25WT-B305	EuroLAN C6 4 pair UTP LSZH Slimline Dca 305m/box
4903205	19D-U6-25WT-T500	EuroLAN C6 4 pair UTP LSZH Slimline Dca 500m/reel
4903202	19D-U6-25WT-B100	EuroLAN C6 4 pair UTP LSZH Slimline Dca 100m/box

Only 5.4 mm
in diameter

- APARTMENT DISTRIBUTION -



C6 UTP KEYSTONE JACK

Erolan Keystone C6 comes in a toolless version (16B-U6-05WT) and a version where termination is made by IDC 110 tool or Erolan Quick tool.

Verified to 250 MHz and manage applications up to 1 Gbit.

Conforms to specifications according to RoHS, EN 50173-1 Class E, ISO/IEC 11801; IEC 332-1



E-number	Part number	Description
5147286	16B-U6-03BL*	Erolan Keystone RJ45 Cat 6 black
5147285	16B-U6-03WT*	Erolan Keystone RJ45 Cat 6 white
5147287	16B-U6-05BL	Erolan Keystone RJ45 Toolless Cat 6 Black
5147288	16B-U6-05WT	Erolan Keystone RJ45 Toolless Cat 6 White
5140041	16B-U6-03WT-100*	Erolan Keystone RJ45 Cat 6 white 100pcs

Reduce waste
and time, chose the
multipack
16B-U6-03WT-100

* termination is made by IDC 110 tool or Erolan Quick tool.



QUICK TOOL

Erolan Quick Tool enables quick installations of Erolan keystone jack. Mounts and cuts 4 pairs at a time. The Quick tool tool saves up to 85% of the time of contact compared to traditional 110 tools.

E-number	Part number	Description
1649770	10F-01-01	Erolan Quick Tool
1649771	10-QT-M180	Erolan Quick Tool cutting module

- APARTMENT DISTRIBUTION -



C6 UTP PATCHPANEL

19" patchpanel 24/48 port with Eurolan keystone footprint.
The panel is built in black painted steel. 1 HE.

27B-00-24BL

Cable striping organizer is included as well as marking list for 24 ports.

27B-00-48BL

Cable striping organizer is included.

NOTE! Eurolan Toolless Keystone do NOT fit in this panel.

E-number	Part number	Description
5120075	27B-00-24BL	Eurolan Patchpanel 1U 24 port Keystone snap-in 1U
5120099	27B-00-48BL	Eurolan Patchpanel 1U 48 port Keystone snap-in 1U



WALL OUTLETS

Eurolan socket for broadband installations and traditional real estate networks.

For exterior or recessed mounting.

The outlet cap has a dust hatch and fits all Eurolans keystone sockets.

For external mounting, the socket is supplemented with the Eurolan Wallbox.

RAL 9010 and halogen free (LSZH). Conforms to specifications according to RoHS.

E-number	Part number	Description
5118514	12B-1X-01WT	Eurolan Faceplate 86x86 1xAngled Keystone
5118515	12B-1X-02WT	Eurolan Faceplate 86x86 2xAngled Keystone
5118517	12B-1X-03WT	Eurolan Faceplate 86x86 3xAngled Keystone
5118516	16H-FR-40WT	Eurolan Wall box 40mm white

- APARTMENT DISTRIBUTION -



RS/Plus or Exxact design? Custom center plates for Eurolan Keystone.

CENTER PLATES, RS/PLUS, EXXACT AND MOSAIC

For broadband installations and traditional real estate networks.

For exterior or recessed mounting. It comes with one blind plug if 1xKeystone is required.

The outlet cap has a dust hatch and fits all Eurolans keystone sockets.

For external mounting, the socket is supplemented with requisite wallbox that suits the brand.

RAL 9010 (RS/Plus) RAL 9003 (Exxact) and halogen free.

Mosaic is ready for directly snap-in.

E-number	Part number	Description
5100209	12B-1X-04WT	Eurolan Faceplate 56x56 2xAngled Keystone Plus/RS
5100215	12B-1X-04WT	Eurolan Faceplate 56x56 2xAngled Keystone Exxact
5100216	16A-00-08WT	Eurolan Faceplate 45x45 2xAngled Keystone Mosaic



FIBERBOX/OUTLET

Dispensing socket for fiber with space for 2 or 4 fibers, contains splicing cassette, protective sleeves and fastening material.

E-number	Part number	Description
5052127	16F-03-02WT	Eurolan FTTH 2xsimplex print
5060146	16F-02-04WT	Eurolan FTTH 4xSC indoor

- APARTMENT DISTRIBUTION -



IT CABINET INTERNAL

Eurolan IT cabinet for internal mounting in powder coated steel sheet. The cabinet is adapted to the Eurolan Home Modular System for data / telecommunications and television distribution. The door can be mounted right or left-handed. Cable entry on all sides and at the back piece.

E-number	Part number	Description	
5187344	50S-22-20WT	Eurolan Home surfacemount cabinet 20"	362x100x505
5187342	50S-22-28WT	Eurolan Home surfacemount cabinet 28"	362x100x710



ELECTRICAL CABINET

Eurolan electrical cabinet is built in the same design as the Eurolan IT cabinet. The cabinets are in versions of 3 or 4 rows (each row can accommodate 16 modules). In the cabinet there is a ground and a zero rail mounted. Color: Ral 9010

E-number	Part number	Description	
2500097	50E-22-20WT	Eurolan Home Surface Electrical cabinet 20"	362x100x505
2500098	50E-22-28WT	Eurolan Home Surface Electrical cabinet 28"	362x100x710

- APARTMENT DISTRIBUTION -



CABINET ACCESSORIES

- Panel adapted for EuroLAN IT cabinet. EuroLAN keystones fits directly. The panels are made of powder coated steel sheet.
- Panel adapted for EuroLAN IT cabinet. With Lexcom hole image. The panels are made of powder coated steel sheet.
- To lock the accessories in the cabinet use the EuroLAN Home Lock plug.
- The EuroLAN mounting frame is used to customize the EuroLAN Keystone jack against outlets with Lexcom hole image. The mounting frame follows the ROHS directives and is made of LSZH material.
- EuroLAN Home Cabinet Cable striping module is for fixing the copper cable in the back of the cabinet. The panel is made of powder coated steel sheet.
- Shelf for mounting active equipment in EuroLAN IT Cabinets. The shelf is made of powder coated steel sheet.
- Outlet plate with power outlet for installation in EuroLAN IT cabinets. The plate is made of powder coated steel sheet.
- EuroLAN home slim are patch cables made of flat cable which make them extremely flexible and very suitable in confined spaces.

E-number	Part number	Description
5187349	50S-21-03WT	EuroLAN Home Empty panel 16xRJ45
5187384	50S-21-15WT	EuroLAN Home Panel 12XRJ45 Lexcom
5187378	50S-21-07BL	EuroLAN Home Lock plug 10pcs packing
5118865	50S-123-WT	EuroLAN Mounting frame Lexcom/keys WT
5187348	50S-21-02WT	EuroLAN Home Cabinet Cable striping module
5187347	50S-21-05WT	EuroLAN Home Cabinet angle shelf
5187371	50S-21-11WT	EuroLAN Home 4x230V power outlet
5169818	50S-60-05WT	EuroLAN Home C6 UTP slim 0,5m white PVC
5169817	50S-60-0DWT	EuroLAN Home C6 UTP slim 0,3 white PVC
5169836	50S-60-01WT	EuroLAN Home C6 UTP slim 1m white PVC
5169837	50S-60-02WT	EuroLAN Home C6 UTP slim 2m white PVC



- BUILDING BACKBONE -



MICRO DUCTS / INDOOR

Eurofan indoor micro ducts for blown fiber installations in dimension 5 / 3.5.

The micro ducts are fire rated in accordance with IEC 60332-1. They are available in white color and in sizes 1,4,7,12,24.

E-number	Part number	Description
5044230	39P-I1-01-23WT	Eurofan single tube 5/3,5mm FRLSOH indoor
5044231	39P-I1-04-23WT	Eurofan 4xtube 5/3,5mm FRLSOH indoor
5044232	39P-I1-07-23WT	Eurofan 7xtube 5/3,5mm FRLSOH indoor
5044233	39P-I1-12-23WT	Eurofan 12xtube 5/3,5mm FRLSOH indoor
5044235	39P-I1-24-23WT	Eurofan 24xtube 5/3,5mm FRLSOH indoor



MICRO DUCTS / ACCESSORIES

Eurofan duct joints for connecting Eurofan micro ducts.

Mounting between the tube and joint is easily done by pushing the tube into the joint. Important that the tube is cut with a tube cutter to avoid blowing problems. The joints are easily opened by holding the latch ring and pulling the tube.

E-number	Part number	Description
5044250	37B-FO-05-01	Connector 5 mm non protected
5044252	37B-FO-05-05	Connector Stop 5 mm
5044253	37B-FO-05/07	Connector reduction 5/7

- BUILDING BACKBONE -



BLOWNFIBER SM 9/125

Eurofan blown fiber for flexible and cost-effective solutions. The cable is designed to be blown into tubes with an internal dimension of 3.5mm.

Available with 2, 4, 8 and 12 fibers. 2 fiber and 4 fiber have G 657.A glass while 8 and 12 fiber have G 652.D glass.

E-number	Part number	Description
5044246	39BS-S3-02YL	Eurofan Blown fiber smooth surface 2x9/125 G657
5044548	39BS-S3-04YL	Eurofan Blown fiber smooth surface 4x9/125 G657
5044549	39BS-S3-08YL	Eurofan Blown fiber smooth surface 8x9/125 G657
5044550	39BS-S3-12YL	Eurofan Blown fiber smooth surface 12x9/125 G657

BLOWNFIBER SM 9/125

Eurofan blown fiber for flexible and cost-effective solutions.

The cable is designed to be blown into tubes with an internal dimension of 3.5mm.

Preterminated with 2xSC in one end for blowing.



E-number	Part number	Description
5073041	39B-S3-20-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 20m
5068393	39B-S3-30-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 30m
5068394	39B-S3-50-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 50m
5068395	39B-S3-70-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 70m
	39B-S3-100-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 100m
5073042	39B-S3-150-2SC	Eurofan Blown Fiber Pigtail ITU 657 2xSC 150m



FIBERCABLE MICRO BEND TB 2X9/125 OS2 SINGLEMODE

Eurofan Microbend distribution is a SM fiber cable designed for broadband installations.

The fiber cable has a glass with G.657.A technique which makes it very insensitive to micro bends.

E-number	Part number	Description
4963147	39UD-S1M-02D	Tightbuffered FO cable Indoor G657 LSZH 2x9/125 Dca

- BUILDING BACKBONE -



From apartment to basement without joints on the fiber, use micro duct and blown fiber! Future-proof your network!

ODF BLOWN FIBER 19"

ODF 24xSCD 19" unloaded FO termination box for 19" mounting.

24xSC duplex adapter/24xLC quad adapter.

24x5/3,5 mm tubes.

Fitted with M4 screwdriver with thumb nut for easy mounting of accessories.

4 pcs of Self-adhesive cable holder for the ranking of fiber loops.

Follows the RoHS directives.

Made of black painted steel.

E-number	Part number	Description
5057978	47G-00-SCD-BF-BL	Eurolan ODF 19" 24xSC Duplex 1U Blown fiber



PIGTAIL SINGLEMODE OS2/UPC

Eurolan pigtails are delivered with 900um outer sheath.

Glass G652.D

Pieced packed with measurement protocols for each individual pigtail.

TIA/EIA-568B.3, Belcore GR-020 and UL OFNR/FT4.

E-number	Part number	Description
5073209	42B-S1-LC-01U	Eurolan Pigtail LC 9/125 1m UPC
5072334	42B-S1-LC-01U-12	Eurolan Pigtail LC 9/125 1m UPC (12 pcs/box)
5070311	42B-S1-SC-01U	Eurolan Pigtail SC 9/125 1m UPC
5072337	42B-S1-SC-01U-12	Eurolan Pigtail SC 9/125 1m UPC (12pcs/box)

- BUILDING BACKBONE -



PIGTAIL SINGLEMODE OS2/APC


EuroLAN pigtailed cables are delivered with 900um outer sheath.

Glass G652.D

Pieces packed with measurement protocols for each individual pigtail.

TIA/EIA-568B.3, Belcore GR-020 and UL OFNR/FT4.

E-number	Part number	Description
5070313	42B-S1-LC-01A	EuroLAN Pigtail LC 9/125 1m APC
5072333	42B-S1-LC-01A-12	EuroLAN Pigtail LC 9/125 1m APC (12pcs/box)
5070310	42B-S1-SC-01A	EuroLAN Pigtail SC 9/125 1m APC
5072336	42B-S1-SC-01A-12	EuroLAN Pigtail SC 9/125 1m APC (12pcs/box)
5076411	42B-S1-SC-1EA	EuroLAN Pigtail SC 9/125 1,5m APC
5076428	42B-S1-SC-1EA-12	EuroLAN Pigtail SC 9/125 1,5m APC (12pcs/box)

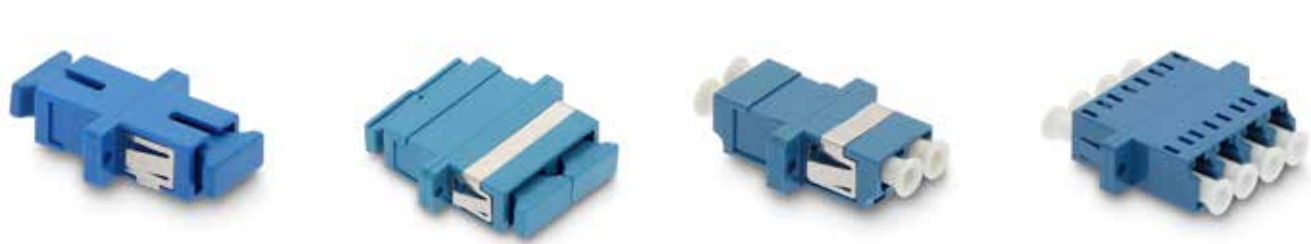

FIBER ADAPTERS OS2/UPC

EuroLAN Singlemode adapters are available in SC and LC versions. They are made with ceramic sleeve and are designed to manage over 500 cycles.

E-number	Part number	Description
5064082	36A-S1-SC-BU	EuroLAN Adapter 1xSC UPC, blue
5063785	36A-S1-2SC-BU	EuroLAN Adapter 2xSC UPC, blue
5064081	36A-S1-2LC-BU	EuroLAN Adapter 2xLC UPC single SC footprint, blue
5063788	36B-S1-4LC-BU	EuroLAN Adapter 4xLC UPC, blue

- BUILDING BACKBONE -



FIBER ADAPTERS OS2/APC

Eurolan Singlemode adapters are available in SC and LC versions. They are made with ceramic sleeve and are designed to manage over 500 cycles.

E-number	Part number	Description
5064093	36A-S1-SC-GE	Eurolan Adapter 1xSC APC, green
5064084	36A-S1-2SC-GE	Eurolan Adapter 2xSC APC, green
5064094	36B-S1-2LC-GE	Eurolan Adapter 2xLC APC, green
5064085	36B-S1-4LC-GR	Eurolan Adapter 4xLC SC APC, green



PROTECTIVE SLEEVES

Eurolan FO sleeve is a 60/45/40 mm protective sleeve for fiber splicing.

E-number	Part number	Description
5062862	32C-MS-60	Eurolan FO protective sleeve, 60mm
5062863	32C-MS-45	Eurolan FO protective sleeve, 45mm
5062054	32C-MS-40	Eurolan FO protective sleeve, 40mm
5062869	32C-RS-40	Eurolan FO Ribbon protective sleeve, 40mm

- BUILDING BACKBONE -



DUST CAPS

Eurolan Dust caps is used as blind plug in fiber box for unused holes.

E-number	Part number	Description
5062860	36A-SC-BL	Eurolan SC dust cap
5062861	36A-SCD-BL	Eurolan SC duplex dust cap



PATCHCORD 9/125 OS2 SC-SC UPC

Kevlar reinforced.

Comes in standard with 2mm outer jacket and LSZH.

G.652D glass in standard.

All connectors are equipped with zirconia ferruls and conform to TIA/EIA568.3, Bellcore GR-02. Testprotocol comes with each item.

E-number	Part number	Description
5076310	41F-S1-SC-SC-01U	Eurolan Patchcord 2xSC-SC 9/125 1m UPC
5076311	41F-S1-SC-SC-02U	Eurolan Patchcord 2xSC-SC 9/125 2m UPC
5076312	41F-S1-SC-SC-03U	Eurolan Patchcord 2xSC-SC 9/125 3m UPC
5076313	41F-S1-SC-SC-05U	Eurolan Patchcord 2xSC-SC 9/125 5m UPC
5076314	41F-S1-SC-SC-07U	Eurolan Patchcord 2xSC-SC 9/125 7m UPC
5076315	41F-S1-SC-SC-10U	Eurolan Patchcord 2xSC-SC 9/125 10m UPC
5076316	41F-S1-SC-SC-15U	Eurolan Patchcord 2xSC-SC 9/125 15m UPC
5076317	41F-S1-SC-SC-20U	Eurolan Patchcord 2xSC-SC 9/125 20m UPC



- BUILDING BACKBONE -



PATCHCORD 9/125 OS2 SC-LC UPC

Kevlar reinforced.

Comes in standard with 2mm outer jacket and LSZH.

G.652D glass in standard.

All connectors are equipped with zirconia ferruls and conform to TIA/EIA568.3, Bellcore GR-02.

Testprotocol comes with each item.

E-number	Part number	Description
5076350	41F-S1-SC-LC-01U	Eurolan Patchcord 2xSC-LC 9/125 1m UPC
5076351	41F-S1-SC-LC-02U	Eurolan Patchcord 2xSC-LC 9/125 2m UPC
5076352	41F-S1-SC-LC-03U	Eurolan Patchcord 2xSC-LC 9/125 3m UPC
5076353	41F-S1-SC-LC-05U	Eurolan Patchcord 2xSC-LC 9/125 4m UPC
5076354	41F-S1-SC-LC-07U	Eurolan Patchcord 2xSC-LC 9/125 7m UPC
5076355	41F-S1-SC-LC-10U	Eurolan Patchcord 2xSC-LC 9/125 10m UPC
5076356	41F-S1-SC-LC-15U	Eurolan Patchcord 2xSC-LC 9/125 15m UPC

PATCHCORD 9/125 OS2 SC-SC APC

Kevlar reinforced.

Comes in standard with 2mm outer jacket and LSZH.

G.652D glass in standard.

All connectors are equipped with zirconia ferruls and conform to TIA/EIA568.3, Bellcore GR-02. Testprotocol comes with each item.



E-number	Part number	Description
5076370	41F-S1-SC-SC-01A	Eurolan Patchcord 2xSC-SC 9/125 1m APC
5076371	41F-S1-SC-SC-02A	Eurolan Patchcord 2xSC-SC 9/125 2m APC
5076372	41F-S1-SC-SC-03A	Eurolan Patchcord 2xSC-SC 9/125 3m APC
5076373	41F-S1-SC-SC-05A	Eurolan Patchcord 2xSC-SC 9/125 5m APC
5076374	41F-S1-SC-SC-07A	Eurolan Patchcord 2xSC-SC 9/125 7m APC
5076375	41F-S1-SC-SC-10A	Eurolan Patchcord 2xSC-SC 9/125 10m APC
5076376	41F-S1-SC-SC-15A	Eurolan Patchcord 2xSC-SC 9/125 15m APC
5076377	41F-S1-SC-SC-20A	Eurolan Patchcord 2xSC-SC 9/125 20m APC

- BUILDING BACKBONE -

PATCHCORD 9/125 OS2 SC-LC APC

Kevlar reinforced.

Comes in standard with 2mm outer jacket and LSZH.

G.652D glass in standard.

All connectors are equipped with zirconia ferruls and conform to TIA/EIA568.

Bellcore GR-02. Testprotocol comes with each item.



E-number	Part number	Description
5076390	41F-S1-SC-LC-01A	Eurolan Patchcord 2xSC-LC 9/125 APC 1m
5076391	41F-S1-SC-LC-02A	Eurolan Patchcord 2xSC-LC 9/125 APC 2m
5076392	41F-S1-SC-LC-03A	Eurolan Patchcord 2xSC-LC 9/125 APC 3m
5076393	41F-S1-SC-LC-05A	Eurolan Patchcord 2xSC-LC 9/125 APC 5m
5076394	41F-S1-SC-LC-07A	Eurolan Patchcord 2xSC-LC 9/125 APC 7m
5076395	41F-S1-SC-LC-10A	Eurolan Patchcord 2xSC-LC 9/125 APC 10m
5076396	41F-S1-SC-LC-15A	Eurolan Patchcord 2xSC-LC 9/125 APC 15m
5076397	41F-S1-SC-LC-20A	Eurolan Patchcord 2xSC-LC 9/125 APC 20m

FLOOR CABINETS 19"

Eurolan Floor Cabinet is intended for active and passive network equipment in broad band or office networks. Grounding kit and leveling legs included.

Height: Inside: 1870mm, outside: 2098mm

Max load: 600 kg

Front door: Tinted glass with metal frame or entirely in metal, both with locking function. The removable door can opens both to the left and right and can easily be changed based on which direction you prefer.

Rear door: Metal, with locking function.

Upper cover plate: Ventilation holes in the ceiling of the cabinet. Fan module can be mounted on the inside of the ceiling.

Bottom: The cabinets can be placed directly on the floor, on the supplied level feet or on wheels (not included).

19"track: Zinc-lined steel track, adjustable in depth.

Cable inputs: One width-adjustable input with thick rubber edges at the bottom and one input with brushes on the rear door.

Grounding: The frame and the movable components are equipped with earth blades.

Coating: High quality powder coating.

Color: Light gray 7035 (side panels in metal)

Delivery: Mounted, in carton.



E-number	Part number	Description
2599287	60F-42-88-08GY	Eurolan 19" Racknet Cabinet 42U 800x800mm, double glass door
2599288	60F-42-88-09GY	Eurolan 19" Racknet Cabinet 42U 800x800mm, metal door

- BUILDING BACKBONE -

OPEN RELAY RACK 19"

Eurolan Relay Rack is a full height wall stand with basket nut hole pattern.

The stand is 42U and comes with 4 700 mm or 500 mm wall brackets.

The stand is made of steel sheet and complies with the RoHS directive. Not divisible at height.

E-number	Part number	Description
5001025	60L-42-19-05	Eurolan Open relay rack 4x500mm
5001026	60L-42-19-07	Eurolan Open relay rack 4x700mm



WALL CABINETS

Eurolan Wall cabinet is intended for active and passive networking in broadband or office networks.

The side- and back panels are removable, with lock.

Cable entry (rubber opening) in the top, bottom and back.

Front door is reversible for left or right opening.

Delivered mounted, in carton box.

IP 20, indoor.

E-number	Part number	Description
2598587	60W-07-64-09GY	Eurolan 19" Wall Cabinet 7U 600x450mm, metal door
2598573	60W-07-65-08GY	Eurolan 19" Wall Cabinet 7U 600x560mm, glass door
2598560	60W-07-65-09GY	Eurolan 19" Wall Cabinet 7U 600x560mm, metal door
2598574	60W-09-65-08GY	Eurolan 19" Wall Cabinet 9U 600x560mm, glass door
2598561	60W-09-65-09GY	Eurolan 19" Wall Cabinet 9U 600x560mm, metal door
2598575	60W-12-65-08GY	Eurolan 19" Wall Cabinet 12U 600x560mm, glass door
2598570	60W-12-65-09GY	Eurolan 19" Wall Cabinet 12U 600x560mm, metal door
2598576	60W-16-65-08GY	Eurolan 19" Wall Cabinet 16U 600x560mm, glass door
2598571	60W-16-65-09GY	Eurolan 19" Wall Cabinet 16U 600x560mm, metal door
2598577	60W-20-65-08GY	Eurolan 19" Wall Cabinet 20U 600x560mm, glass door
2598572	60W-20-65-09GY	Eurolan 19" Wall Cabinet 20U 600x560mm, metal door

- BUILDING BACKBONE -



Prepared for
Assa cylinder

WALL CABINETS / METAL DOOR PREPARED FOR ASSA

Same characteristic features as 60W-07-65-09GY, 60W-09-65-09GY and 60W-12-65-09GY above, but with difference that the metal door is prepared for putting in an Assa-cylinder.

E-number	Part number	Description
2502037	60WA-07-65-09GY	Eurolan 19" Wall Cabinet 7U 600x600mm metal door ASSA
2502035	60WA-09-65-09GY	Eurolan 19" Wall Cabinet 9U 600x600mm metal door ASSA
2502036	60WA-12-65-09GY	Eurolan 19" Wall Cabinet 12U 600x600mm metal door ASSA

Weights and Measures

U (unit height)	Internal height (mm)	External height (mm)	Weight (kg)
7	314	381	21
9	403	470	23
12	536	604	26
16	714	778	30
20	892	960	35



For limited spaces!
3 + 2 U at only
14 cm deep!

VERTICAL WALL CABINET

The Eurolan slimline cabinet is a 19 "wall cabinet for tight spaces or for installation in an open environment when the design is discreet.

Height units: 5 (3 + 2) 3U in the top edge and 2U at the bottom.

Cable inputs: Bottom and from both sides.

Max weight: 80kg

Color: Gray RAL 7035

E-number	Part number	Description
2598588	60W-49-47-14-21GY	Eurolan 19" Slimline Wall cabinet 500x140x575, metal door

- BUILDING BACKBONE -



CABLE MANAGEMENT

Eurolan wire conductor is 1U and can handle up to 40 pcs C6 UTP cables.

19 "and with 5 jumpers.

Eurolan Finger duct manager comes in 1 and 2U and has a cover in the front.

E-number	Part number	Description
2598583	25B-1U-02BL	Eurolan Wiremanager vertical 1U metal black
2503662	25B-1U-11BL	Eurolan Finger Duct Cable Management with Cover 1U
2503663	25B-2U-11BL	Eurolan Finger Duct Cable Management with Cover 2U

FAN PACKAGE FLOOR CABINET

Specifications

Thermostatic

Complete with internal wires

Easily accessible and maintenance-friendly

Technical information

Electrical connection: 220-240 VAC, 50 / 60Hz, 0.25 A

Fuse: 2.5 A glass fuse

Sound level: 47 dB

Fan capacity: A fan has an air flow of 2.3 m³ / min

Protection: IP20

The thermostat setting range: 0-35C

Surface treatment: Phosphate coating

Color: RAL 7035



Standards

ISO 9001: 2000

CE Certified

RoHS Certified

Meets requirements according to UL and cUL

E-number	Part number	Description
2599283	60A-90-02-07GY	Cooling unit w 2fan+t-stat controlled wall, for universal
2599282	60A-90-04-07GY	Fan T-stat for server

- BUILDING BACKBONE -

FAN PACKAGE WALL CABINET

Specifications

Switch

Complete with internal wires

Easily accessible and maintenance-friendly

Technical information

Electrical connection: 220-240 VAC, 50 / 60Hz, 0.25 A

Fuse: 2.5 A glass fuse

Sound level: 47 dB

Fan capacity: A fan has an air flow of 2.3 m³ / min

Protection: IP20

The thermostat setting range: 0-35C

Surface treatment: Phosphate coating

Color: RAL 7035

Meets requirements according to UL and cUL



Standards

ISO 9001: 2000

CE Certified

RoHS Certified

E-number	Part number	Description
2598589	60A-90-02-18GY	Eurolan Fan Tray 2-fan for wall cabinet





A close-up photograph of a grey mesh grille, likely part of a car's interior or exterior trim. The grille features a repeating hexagonal pattern. To the right of the grille is a grey, curved handle or button. A white rectangular label with a thin black border is attached to the handle. The label contains the word "EURODLAN" in a stylized, italicized, sans-serif font. The lighting is soft, highlighting the textures of the mesh and the handle.

EURODLAN

