

PRODUCT SPECIFICATION

CONNECT


IT

EUROLAN Duct Microduct DB SRE/P 3x14/10

Ordering information

Part number	E-number	Description
40P-D1-03-SRE/P-BL-1	5045441	MICRODUCT DB SRE/P 3X14/10MM

Component	Key number	Nom. Outside Ø (mm)	Nom. Wall thickness (mm)
Microduct	1	14,0 ±0,1	2,0 ±0,1
Inner sheath (PP)	2	33,2 ± 0,6	2,0 ±0,2
Outer sheath (PE)	3	35,2 ± 1,0	1,0 ±0,2

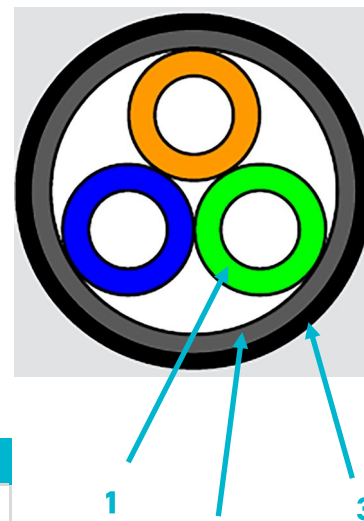

Characteristics at 23°C (nominal average values, indicated for information)

Total duct	
Crush resistance at 5% (acc. EN 61386-24)	> 750N
Ring stiffness (acc. ISO 9969)	50kPa
Weight	452 kg/km
UV resistance of the outer PE sheath	At least 15 years
Maximum pulling force (on sheath)	4550 N
Maximum pulling force (on microducts)	3350 N
Minimum bending radius (on drum)	0,7 M
Color	Black RAL 9017
Elementary duct (14/10)	
Crush resistance at 5% (acc. EN 61386-24)	~ 1500 N
Maximum pulling force	~ 1500 N
Nominal hydrostatic pressure resistance	PN 20
Pre-lubrication class	Silicore
Color	Orange, Yellow, Red
Packaging	
Lost wooden drum	2400x1400x1000 mm
Length	1500 m (every 1 m)
Weight of full drum	1218 kg