

PRODUCT SPECIFICATION

CONNECT


IT

EUROLAN Duct Microduct DB SRE/P 7x7/3,5

Ordering information

Part number	E-number	Description
39P-D1-07-SRE/P-BL-2000	5045563	MICRODUCT DB SRE/P 7x7/3,5

Component	Key number	Nom. Outside Ø (mm)	Nom. Wall thickness (mm)
Microduct	1	7,0±0,1	1,75 ±0,1
Inner sheath (PP)	2	24,0 ± 0,7	1,5 ±0,2
Outer sheath (PE)	3	26,0 ± 1,0	1,0 ±0,2

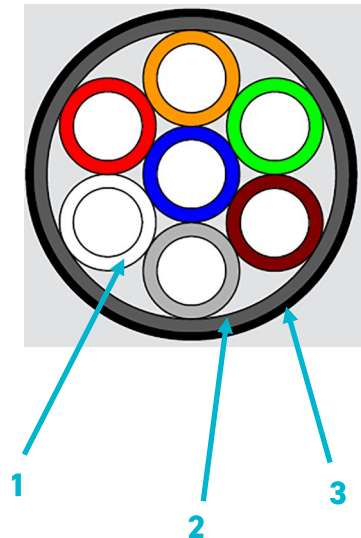

Characteristics at 23°C (nominal average values, indicated for information)

Total duct	
Crush resistance at 5% (acc. EN 61386-24)	> 750N
Ring stiffness (acc. ISO 9969)	64kPa
Weight	366 kg/km
UV resistance of the outer PE sheath	At least 15 years
Maximum pulling force (on sheath)	4100 N
Maximum pulling force (on microducts)	7300N
Minimum bending radius (on drum)	0,45M
Color	Black RAL 9017
Elementary duct (14/10)	
Crush resistance at 5% (acc. EN 61386-24)	~ 2100 N
Maximum pulling force	~ 470 N
Nominal hydrostatic pressure resistance	PN 38
Pre-lubrication class	Silicore
Color	Orange, Yellow, Red, White, Green, Blue, Violet
Packaging	
Lost wooden drum	1900x900x1000 mm
Lenght	2000 m (every 1 m)
Weight of full drum	932 kg